


Powered by

YANMAR

LIGHT BOY series

ELB43SD

400W Metal Halide Lamp x 4
Cart type / Spotlight

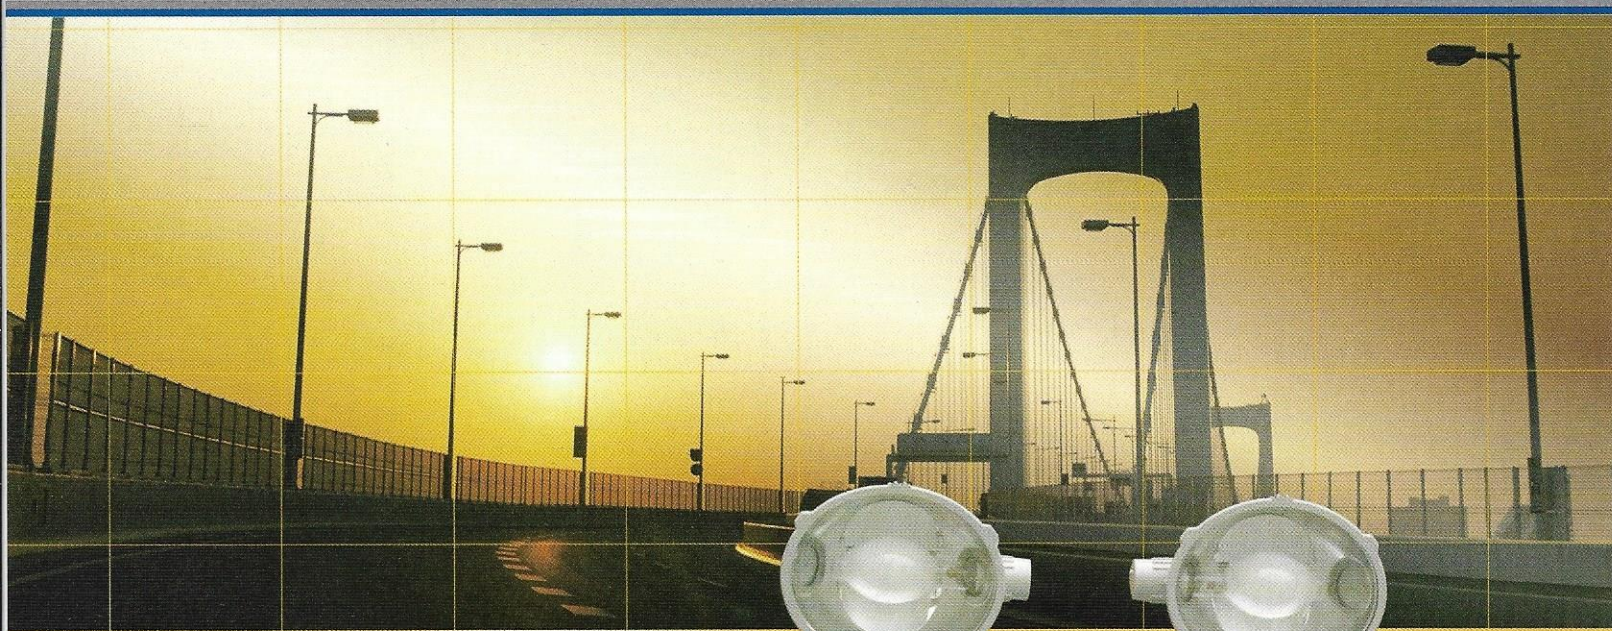

Compact & Supersilent

- Powerful output of 4 metal halide lamps
- Compact body allows multiple unit transportation
- Unique and reliable safety devices
- Ensure a stable brightness supply by E-ballast.
- Steerable cart design for easy transportation.

Give the Best Performance

- QUICK RESTRIKE TIME**
- YDG300NS** Diesel Gen-set
- E-BALLAST** Electronic ballast



LIGHT BOY CO., LTD.

ELB43SD

400W Metal Halide Lamp x 4

LIGHT BOY
SERIES

LONG-LIVED & HIGH EFFICIENCY LAMP

METAL HALIDE LAMP being used for LIGHT BOY is high efficiency, longer life and stronger to vibration compared with HALOGEN LAMP.

Metal Halide (400W)

Halogen (500W)

34,000 lumen

BRIGHTNESS

9,500 lumen

10,000 hours

LIFE HOURS

2,000 hours


3.3 A

REQUIRED AMPERAGE

14.5 A

HIGH EFFICIENCY E-BALLAST

From the wavy line of digital type of electric ballast, even the wavy line get down, the dark area is a quick moment.

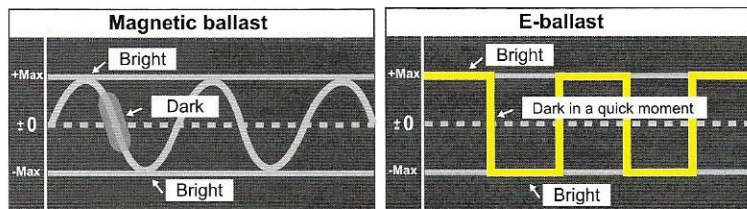

DUSK-DAWN OPERATION WITHOUT FILL-UP

A single tankful of diesel will keep these air-cooled gensets on the go for 21 hours. The secret to such long operation is their low fuel consumption from features like direct injection - a major feat for this type of compact engine. These gensets give savings with every tankful of diesel. And they have a utility-size fuel tank, so you can leave them running all night.



YDG300NS


MULTIPLE UNITS TRANSPORTABLE

As LIGHT BOY is designed very compactly, several units can be transported by one vehicle, or you can utilize an empty space when transporting construction machines.




6 units can be loaded on a 2t truck

EASY TO CHANGE




open-close without a tool. If glass had broken, replace the glass only.

LIGHTING UNIT



can be set to any angle and direction.


ILLUMINATION RANG



3 STAGE MAST

extends up to 4.1m.

SAFETY LOCK



catches the mast in the event of the lifting wire breaking.

SAFETY WINCH



Prevents sudden fall of the mast.


STEERING HANDLE



for easy maneuverability

LIFTING HOOK
for easy transport

OUTRIGGER



Secures the stability of the unit.

BRAKE



Jam on the brakes.

CART

Possible to lift with forklift on the underbody.

SPECIFICATIONS & DIMENSIONS

Lighting Tower	Model		ELB43SD	
	Voltage	V	AC230	
	Current	A	7.8 (1.95x 4 lamps)	
	Lamp	Type		Metal Halide
		Wattage x No. of lamp	W	400 x 4
		Total Luminous Flux	lm	136,000
		Outside temperature	F	23 to 104
Dimension (LxWxH)	Working	ft.in.	5'3" x 5'1" x 6'6" to 13'7"	
		(mm)	1600 x 1550 x 2060 to 4160	
Mast	Storage	ft.in.	3'4" x 3'3" x 5'6"	
	(mm)		1040 x 1030 x 1700	
Mast	Number of Stage		3	
	Type		Telescopic Manual	
Generator	Weight	kg	131.5	
	Model		YDG300NS	
	Output	Kw	3.0	
	Starting System		Electric	
	Fuel Oil / Tank capacity	L	Diesel Fuel / 14.5	
	Dry Weight	kg	152	
	Survival wind speed (with outrigger)		102 km/h	
Total Weight	kg	283.5		



KURASHIKI EQUIPMENT PHILIPPINES CORPORATION

88 Block 4, North Reclamation Area Subangdaku, Mandaue City, 6014 Cebu, Philippines

Tel.: +63 32 346-2297; 346-0171; +63 32 343-8608; 422-3789 • Fax: +63 32 346-2295

Mobile No.: +63 917 636 0888 • E-mail: staff@yanmar.ph